

# Configuring NXLog to Send Additional Files in Nagios Log Server 2024R2

## Purpose

This document shows how you can extend the log collecting capabilities of NXLog on a Windows server by monitoring your own custom logs.

## Requirements

It is assumed you have already installed NXLog on your Windows server and configured it to send logs to Nagios Log Server. This is covered in the following article:

[Monitoring A New Log Source](#)

## Considerations

It's very easy to set up NXLog to monitor your own custom logs. When you configure NXLog, by default you will only be collecting new data that comes in from that point forward. If you wanted to import the contents of the existing log file there are a couple of extra steps required. This article will walk you through those steps.

This guide is going to focus on the file `C:\Important_Application\Logs\log.txt` as an example.

Please make sure you read the entire guide, otherwise duplicate data may be imported to your Nagios Log Server.

## Configure NXLog

Login to your Windows server and open the file:

```
C:\Program Files (x86)\nxlog\conf\nxlog.conf
```

...in Notepad.

# Configuring NXLog to Send Additional Files in Nagios Log Server 2024R2

Add the following to the end of the file:

```
<Input important_application>
  Module    im_file
  File      'C:\Important Application\Logs\log.txt'
  SavePos   FALSE
  ReadFromLast FALSE
  Exec      $Message = $raw_event;
</Input>
```

In the same file, find the following section:

```
<Route 1>
Path internal, file1, eventlog => out
</Route>
```

Change the path line so we now reference the new input **important\_application**:

```
<Route 1>
Path internal, file1, eventlog, important_application => out
</Route>
```

Save the changes you just made, the next step will be to restart NXLog.

Open **services.msc** and **restart** the **nxlog** service.

If you have additional files that need to be imported to Nagios Log Server, repeat the steps above to add another **Input** and add that to the **Route**.

# Configuring NXLog to Send Additional Files in Nagios Log Server 2024R2

To explain the changes made above, the name `important_application` is what Nagios Log Server will identify as the `SourceModuleName` field when it is received.

You can see in the screenshot to the right from Nagios Log Server, it shows the field `SourceModuleName` with the value of `important_application`.

The following `nxlog.conf` settings need to be highlighted:

```
SavePos FALSE
ReadFromLast FALSE
```

These two options, set this way, will force NXLog to send the entire contents of the existing log file to Nagios Log Server. Without these options, nothing will be sent to Nagios Log Server until new content is added to the file. It can be useful to import the existing log data as it will help confirm that NXLog is successfully sending the logs to Nagios Log Server.


## Check Log Server

After restarting NXLog, it won't take long for the data to be received by your Nagios Log Server:

- Login to Nagios Log Server
- Open the Default dashboard
- Perform a search for a word that exists in the:

```
C:\Important Application\Logs\log.txt
```

```
...file
```

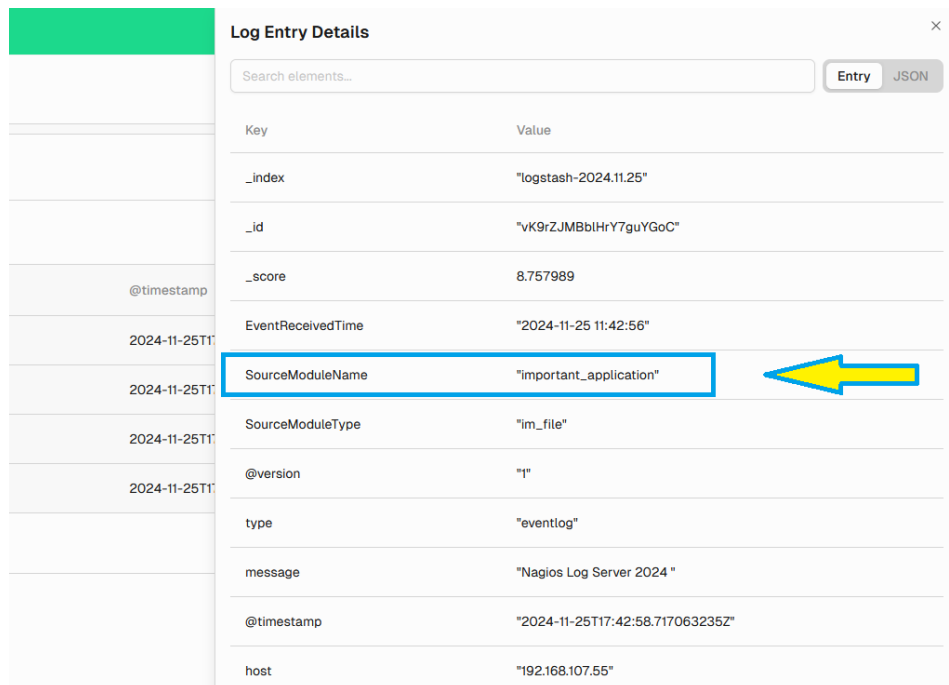

The screenshot shows the 'Log Entry Details' window in Nagios Log Server. A table lists various fields and their values. The field 'SourceModuleName' is highlighted with a blue box, and a yellow arrow points to its value 'important\_application'.

Key	Value
_index	"logstash-2024.11.25"
_id	"vK9rZJMBbIHrY7guYGoC"
_score	8.757989
EventReceivedTime	"2024-11-25 11:42:56"
SourceModuleName	"important_application"
SourceModuleType	"im_file"
@version	"1"
type	"eventlog"
message	"Nagios Log Server 2024 "
@timestamp	"2024-11-25T17:42:58.717063235Z"
host	"192.168.107.55"

# Configuring NXLog to Send Additional Files in Nagios Log Server 2024R2

Once you see it appear in the dashboard search results, the log is being successfully imported. The screenshot above shows just that.

## Update NXLog Config

Now we need to re-configure NXLog so that it doesn't re-read the entire file the next time the service is started. If this happened, you would end up with all the same entries being sent to Nagios Log Server each time the service is started.

Open the file `C:\Program Files (x86)\nxlog\conf\nxlog.conf` in Notepad and find the section you added before:

```
<Input important_application>
  Module      im_file
  File        'C:\Important Application\Logs\log.txt'
  SavePos     FALSE
  ReadFromLast FALSE
  Exec        $Message = $raw_event;
</Input>
```

And change it to:

```
<Input important_application>
  Module      im_file
  File        'C:\Important Application\Logs\log.txt'
  SavePos     TRUE
  Exec        $Message = $raw_event;
</Input>
```

The change you just made was:

Changed `SavePos` to `TRUE`

Removed the line `ReadFromLast FALSE`

# Configuring NXLog to Send Additional Files in Nagios Log Server 2024R2

Save the changes you just made and restart the NXLog service like you did earlier. After the service restarts, only new lines that are added to the C:\Important Application\Logs\log.txt file will be sent to Nagios Log server.

For more information on configuring Nagios Log Server with Windows, see the NXLog User Guide.

## Finishing Up

This completes the documentation on Configuring NXLog to Send Additional Files in Nagios Log Server 2024R2. If you have additional questions or other support-related questions, please visit us at our Nagios Support Forum, Nagios Knowledge Base, or Nagios Library:

[Visit Nagios Support Forum](#)

[Visit Nagios Knowledge Base](#)

[Visit Nagios Library](#)